


**FIT**

Manual assembly benches



Sash and casement assembly bench. Horizontal bench with pneumatic exchange between the soft PVC resting surface (for assembly operations) and the anti-friction hard PVC resting surface (for handling operations). The work table height is adjustable from 895 to 965 mm and the mounting feet are complete with holes for floor anchoring.

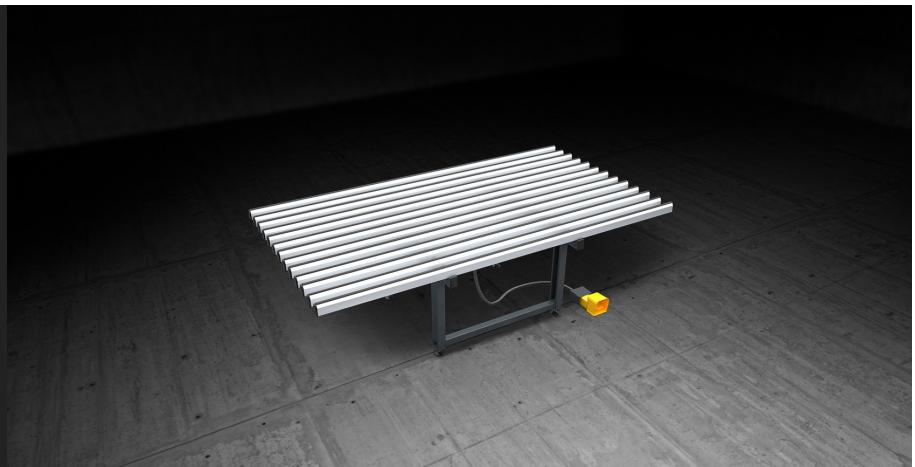

### Surface in soft nonslip PVC

The working surfaces are covered with soft nonslip PVC that provides secure support when positioning the frame.



### Support surface in hard anti-friction PVC

The anti-friction hard PVC support surface ensures great smoothness of the frame allowing easy handling.



### Pneumatic bench exchange

A pneumatic cylinder system operates the pneumatic exchange ensuring that the hard PVC support surface rises with respect to the soft PVC support surface.



### Adjustable feet

Height adjustable feet to ensure the work bench can be positioned at the required height and perfectly flush with the other products in the Dynamic Line. The feet also have holes so they can be anchored to the floor.



**Emmegi S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

Tel +39 059 895411  
Fax +39 059 566286  
P.Iva/C.Fisc 01978870366  
info@emmegi.com  
www.emmegi.com

The right to make technical alterations is reserved.

## FIT / MANUAL ASSEMBLY BENCHES

## CHARACTERISTICS

Length (based on model) (mm)	1.400 ; 2.000 ; 2.500 ; 3.000
Width (mm)	1.600
Roller bench	<input type="radio"/>
Pneumatic lifting for glass	<input type="radio"/>
Air consumption (NI/cycle)	0,5
Load capacity (kg)	240

## WEIGHT (DEPENDING ON MODEL)

FIT 1,600 X 1,400 mm (kg)	87
FIT 1,600 X 2,000 mm (kg)	96
FIT 1,600 X 2,500 mm (kg)	105
FIT 1,600 X 3,000 mm (kg)	115

Included ● Available ○