
# FIT T

ASSEMBLY TABLES

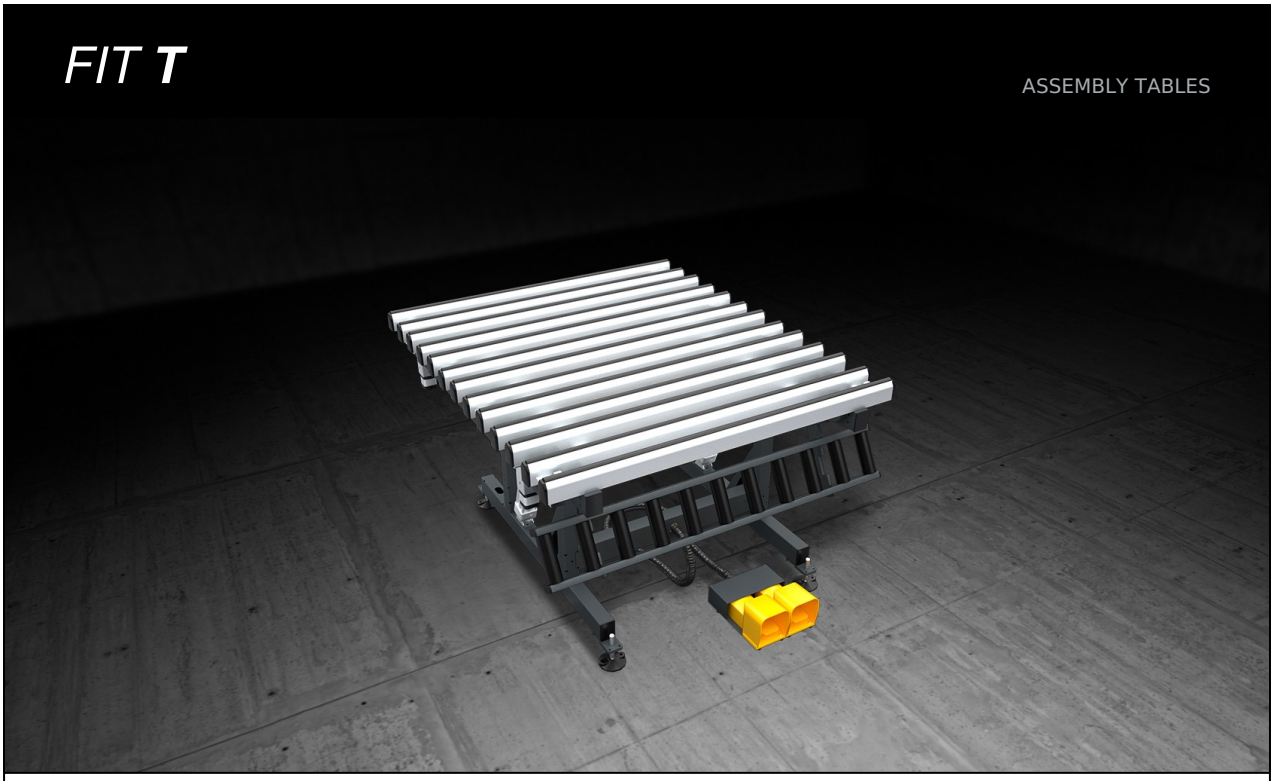

Sash and casement assembly bench. Tilting table from 0° (horizontal) to 85°, with pneumatic exchange between the soft PVC resting surface (for assembly operations) and the anti-friction hard PVC resting surface (for handling operations). The roller conveyor can be manually tilted and it is adjustable in height (from 170 to 460 mm) independently from the work table height. The work table height is adjustable from 895 to 965 mm and the mounting feet are complete with holes for floor anchoring.

**Emmegi S.p.A.**
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.




## Tilting work bench

The work bench is tilting with fully pneumatic movement. By means of the footswitch, the work surface can be tilted from 0°, horizontal position, to 85°.




## Pneumatic bench exchange

A pneumatic cylinder system operates the pneumatic exchange ensuring that the hard PVC support surface rises with respect to the soft PVC support surface.

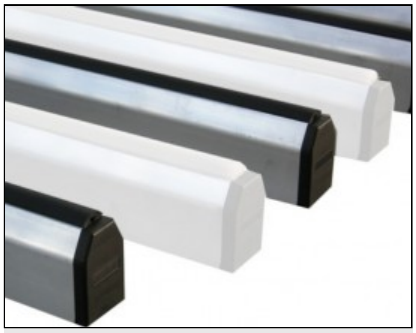

## Surface in soft nonslip PVC

The working surfaces are covered with soft nonslip PVC that provides secure support when positioning the frame.

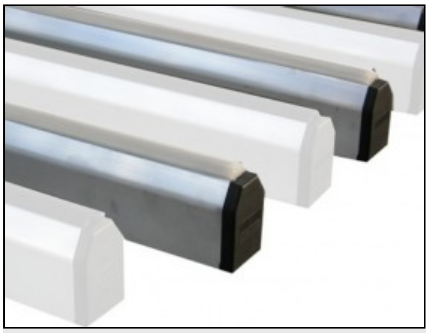

## Support surface in hard anti-friction PVC

The anti-friction hard PVC support surface ensures great smoothness of the frame allowing easy handling.



## Door sliding roller conveyor

A manually-operated tilting roller conveyor with automatic locking to 2 preset positions allows horizontal translation of the frame by stem-mounted rollers that ensure smoothness and ease of movement.

**Emmegi S.p.A.**
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

## **FIT T** / ASSEMBLY TABLES

| CHARACTERISTICS | |
|---|---|
| Length (based on model) (mm) | 1.400 ; 2.000 ; 3.000 |
| Width (mm) | 1.600 |
| Height adjustable roller conveyor (mm) | 170 ÷ 460 |
| Height adjustable work bench (mm) | 895 ÷ 965 |
| Weight (kg) | 135 |
| Roller conveyor width (mm) | 150 |
| Load capacity (kg) | 120 |
| Air consumption (Nl/cycle) | 25 |

Included ● Available ○

**Emmegi S.p.A.**
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.