

## MODULE BENCH

Manual assembly benches



Large size and extendible modular bench for assembling of windows and curtain wall frames. It features 3 distinct work tables: one of soft PVC for assembly operations, one of anti-friction hard PVC for the rotation and a roller conveyor for in-line movements.

**Emmegi S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY


Tel +39 059 895411  
Fax +39 059 566286  
P.Iva/C.Fisc 01978870366  
info@emmegi.com  
www.emmegi.com

The right to make technical alterations is reserved.



### Retractable bench

Push-button operated and covered with rollers, the retractable bench allows the bench to be connected to the production line and can be tilted so as not to hinder the operator's movements during assembly operations.

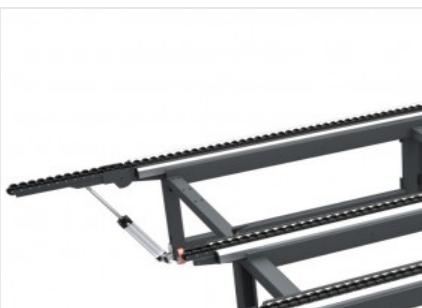


### Extension

Module Bench can extend from 1,300 mm to 2,500 mm and can be set in any position using a clamping lever, providing great versatility. It is also possible to manually position the centre crossbeam for machining small frames.



### Roller bench

The roller bench allows the window frame to be transferred along the assembly line with minimal effort on the part of the operator.

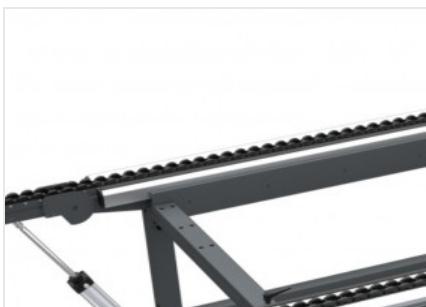

### Support surface in soft nonslip PVC

The soft PVC support surface provides a high friction coefficient during assembly procedures.



### Support surface in hard anti-friction PVC

The anti-friction hard PVC work surface allows for a low coefficient of friction, which facilitates rotational movements of the door.

## MODULE BENCH / MANUAL ASSEMBLY BENCHES

## WORK BENCHES

RH or LH retractable roller bench	●
Possibility of pneumatic exchange between different work benches (roller bench, soft PVC bench, hard anti-friction PVC bench)	●
Soft PVC bench length (mm)	4.000
Anti-friction hard PVC bench length (mm)	4.000
Roller bench length (mm)	4.000
Extended roller bench length (mm)	4.600
Retractable roller bench length (mm)	600

## CHARACTERISTICS

Extensible in width (mm) with movable centre support	1.300 ÷ 2.500
Height (mm)	900
Air consumption (NI/min)	50
Load capacity (kg)	800
Weight (kg)	550

Included ● Available ○