PRECISION T2 E-HS

DOUBLE MITRE-SAWS



Double-head cutting-off machine with 5 controlled axes for aluminium, PVC and light alloys with automatic movement of the mobile head and electronic management of all 45° (internal) to 15° (external) angles, with a precision, within each degree, of 280 positions. In the basic version blade advancement is driven by a couple of hydro-pneumatic cylinders. In version E this advancement is also managed by a couple of CN axes, to ensure optimal speed regulation and output travel of the blades. 550mm-blade Available with a useful cut of 5 m or 6 m in length. The HS (High Speed) version envisions an X axis with higher speed and all necessary protections for the automatic work, even unattended, in order to obtain maximum production.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.




Control

The ergonomic state-of-the-art control panel features a 10.4” touchscreen display and fully customised software and is packed with functions developed in the Microsoft Windows® environment specifically for this machine. The machining cycle can be optimised by creating cutting lists, thereby reducing scrap and cycle times for workpieces loading-unloading.



Load and unload

The Precision cutting-off machine can be equipped with a roller conveyor on the mobile head, for standard feeding and unloading, or on the fixed head for feeding from the left-hand side. A pneumatic stop device on the mobile head is available to ease positioning of the profile in this loading mode.

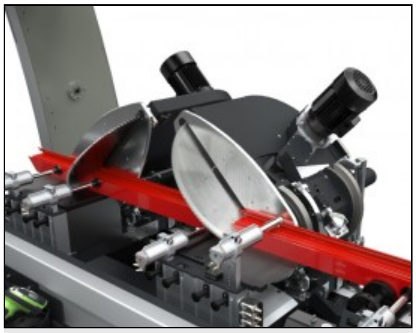

Cutting units inclination virtual axis

Inclination of each head of up to 15° outwards is provided by two circular guides mounted on four pairs of steel rollers. This patented solution makes it possible to eliminate obstructions in the cutting area, all to the benefit of profile positioning and clamping, while also offering greater rigidity than traditional systems.



Profile clamping

Making use of the ample space provided by the use of the virtual axis, clamping of the profile to be cut is performed by two horizontal hold-down devices with extreme precision and in absolute safely. For vertical clamping, particularly for special cuts, the machine can be equipped with a patented system of horizontal hold-down devices.



HS – High Speed

The HS – High Speed version is equipped with a faster X axis (mobile head positioning), and features an integral protection on the sides and at the back, to operate in complete safety, increasing productivity. The safety characteristics of this version, fully inaccessible during operation, allow using automatic cutting cycles, even not supervised, at maximum operational performance.


Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

PRECISION T2 E-HS / DOUBLE MITRE-SAWS

LAYOUT

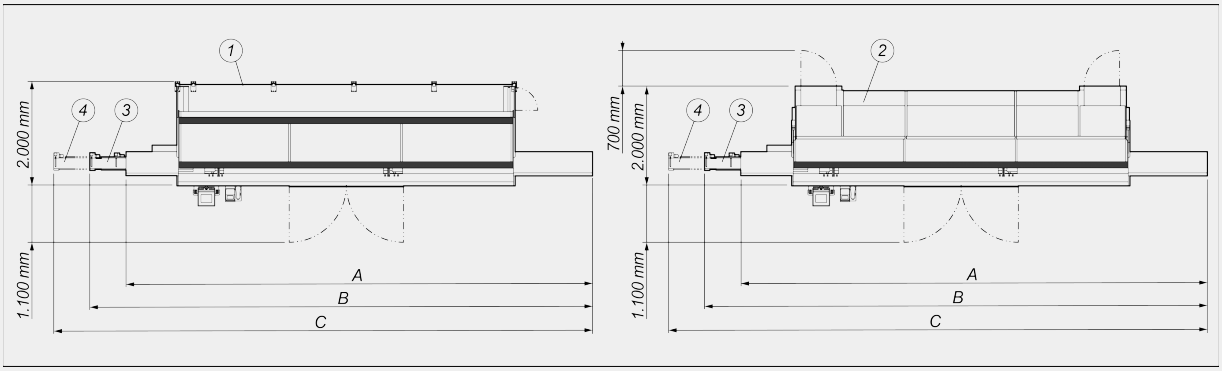

	A	B	C
Precision T2E HS - 5m (mm)	9.100	9.700	10.300
Precision T2E HS - 6m (mm)	10.100	10.700	11.300

1. Enclosure guard of the 4th side (optional)
2. Soundproofed integral protection cabin with internal lighting (optional)
3. Conveyor belt for step-by-step or automatic cut L=1.900 mm (optional)
4. Conveyor belt for step-by-step or automatic cut L=2.500 mm (optional)

The overall dimensions may vary depending on the product configuration.

MACHINE CHARACTERISTICS


Electronic control of the X axis	●
HS version X axis positioning speed (standard) (m/min)	35
Detection of cutting unit tilting through direct measurement system with absolute magnetic strip	●
Mobile head position reading with absolute magnetic strip direct measuring system	●
HS version X axis positioning speed (optional) (m/min)	50
Electronic control of intermediate angles	●
Maximum internal inclination	45°
Maximum external inclination	15°
Hydropneumatic blade feed	●
CN electronic axis of the blade feed (E version)	●
Effective cut, according to model (mm)	5.000 / 6.000
Cemented carbide blade	2
Blade diameter (mm)	550
Blade motor power (kW)	2,64
Electronic profile thickness gauge	○

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY


Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

CUTTING DIAGRAM

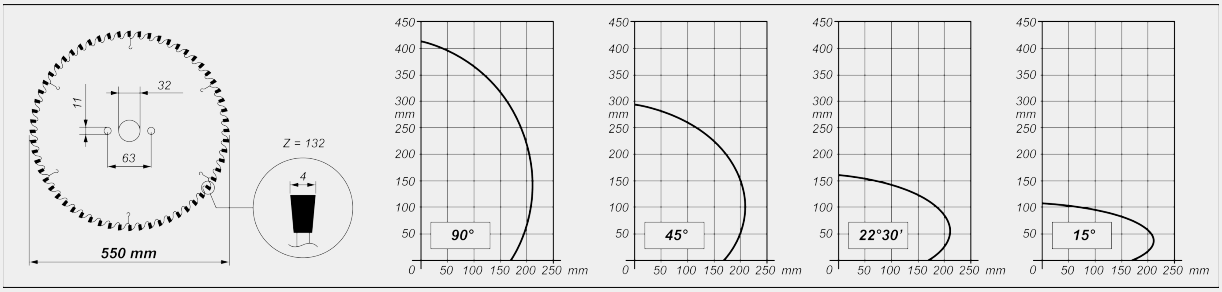

CUTTING UNIT TILTING

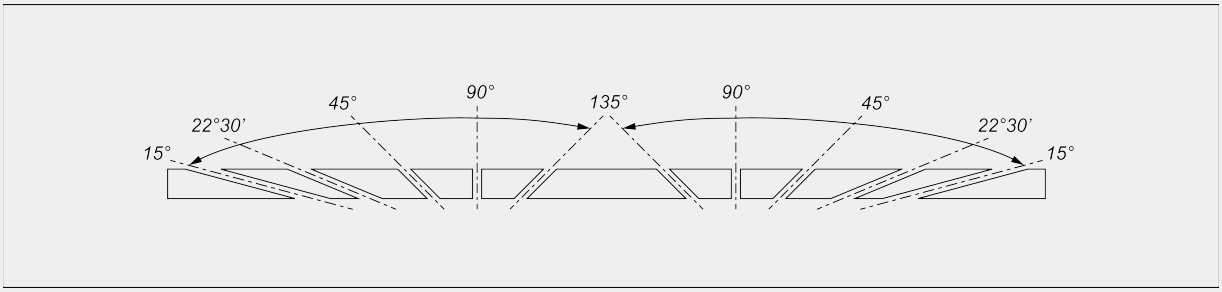

Electronic adjustment of intermediate angles

SAFETY DEVICES AND PROTECTIONS

Electrically operated fully enclosed front guarding	●
Side protection tunnels and wall connection RH and LH fence	●
Enclosure guard of the 4th (rear) side	○
Soundproofed integral protection cabin with internal lighting	○

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

PROFILE POSITIONING AND CLAMPING

Pair of horizontal pneumatic vices with "low pressure" device	●
Pair of horizontal vertical vices	○
Pair of additional horizontal vices	○
Intermediate pneumatic profile support	●
Roller conveyor on the mobile head with servo-controlled pneumatically operated profile supports	●
Additional vice for profile support on mobile head roller conveyor	○
Conveyor belt for step-by-step or automatic cut (HS version only)	○

FUNCTIONS

Perform single cuts	●
Execution of intermediate angles cuts	●
Execution of cyclical cuts from cutting lists	●
Bar optimisation	●

Included ● Available ○

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.