


04/09/2025





Trolley designed for transportation and storage of glasses and panels in the assembly lines.

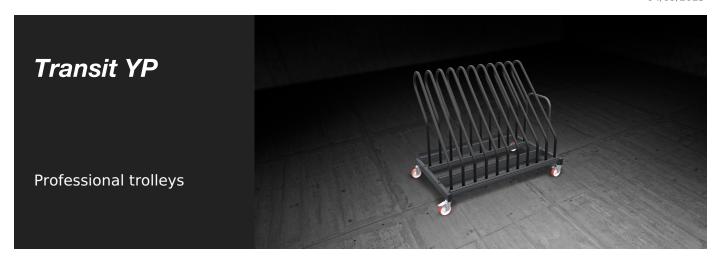

# **TECHNICAL SHEET**

04/09/2025




## **Partitioning**

The carriage has doubled partitioning that allows high increase in the number of transportable workpieces and also considerable savings in terms of occupied space.



### **Contact surfaces**

All side and lower contact surfaces are coated with soft nonslip PVC, which ensures the integrity of the surfaces in the housing stages.



# **Pivoting wheels**

Equipped with 4 pivoting wheels with brakes, they ensure a high degree of mobility and easy handling of the object. Locking the braking units allows their position to be fixed near different work areas.



Emmegi S.p.A. Via Archimede, 10 41019 - Limidi di Soliera (MO) Tel +39 059 895411 Fax +39 059 566286 P.lva/C.Fisc 01978870366 info@emmegi.com www.emmegi.com The right to make technical alterations is reserved.









### TRANSIT YP / PROFESSIONAL TROLLEYS

CHARACTERISTICS	
Compartment depth (mm)	999
Base (mm)	1.240 x 1.010
Vertical support, height (mm)	1.305
Number of compartments	10 x 2
Soft PVC contact surface	•
Wide supporting base	•
Handle for moving	•
4 swivel casters, 2 of which have locking stops (mm)	Ø = 125
Weight (kg)	85
Load capacity (kg)	500

Included • Available O