VEGAMATIC **PUSHER T**

THROUGH FEED SAWING CENTERS



An automatic version cutting centre with 3 controlled axes, manual loading and automatic storage unloading on the opposite side, with front CNC blade, dedicated to cutting Aluminium and PVC profiles and light alloys in general. It performs predefined and optimised cutting lists in automatic. It can execute blunt cutting on both sides of the profile. It is designed to execute cutting at angles from 45° to 135° or from 22°30’ to 157°30’. Configurable with horizontal or vertical drilling units that can be personalised for specific automatic machining.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY


Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.



Ejector

The ejector controlled by the CNC grips the workpiece during machining and, once completed, shifts it from the cutting area to the unloading magazine, holding it in the same position so as to facilitate the subsequent machining phases. Motion is transmitted by means of a toothed belt and secure gripping of the workpiece is ensured by pneumatic cylinders.

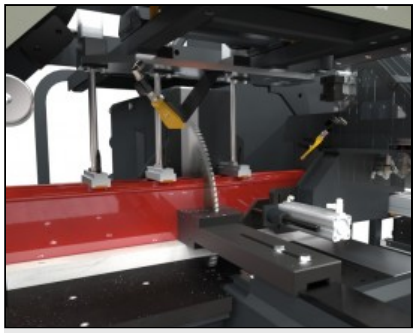


Cutting module

The cutting module consists of a single-head cutting off machine with hydro-pneumatic blade feed. It is provided with a 550 mm blade featuring wide cutting range: from 45° to 135° or from 22°30’ to 157°30’ (based on model). Setting of the cutting angles is fully automatic and is handled by the CNC.



Control

The operator interface with 15" touchscreen display has a network connection, USB ports and a floppy disk drive for communicating with external devices. It also features a built-in control panel, mouse and keyboard, it is preset for the installation of a label printer and connection to a remote control panel.

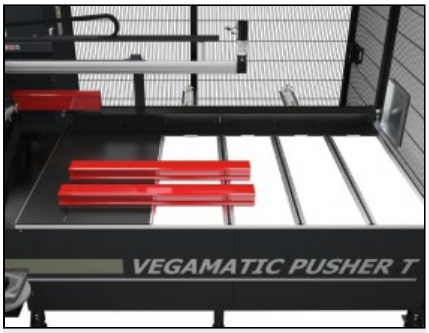

Unloading magazine

The workpiece unloading magazine has an automatic tilting and moving system that enables machining to be performed continuously, thus reducing the cycle time. In addition, the magazine allows finished workpieces to be stacked while a sensor, which emits a signal when the magazine is full, supervises system operation.


Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

VEGAMATIC PUSHER T / THROUGH FEED SAWING CENTERS

LAYOUT

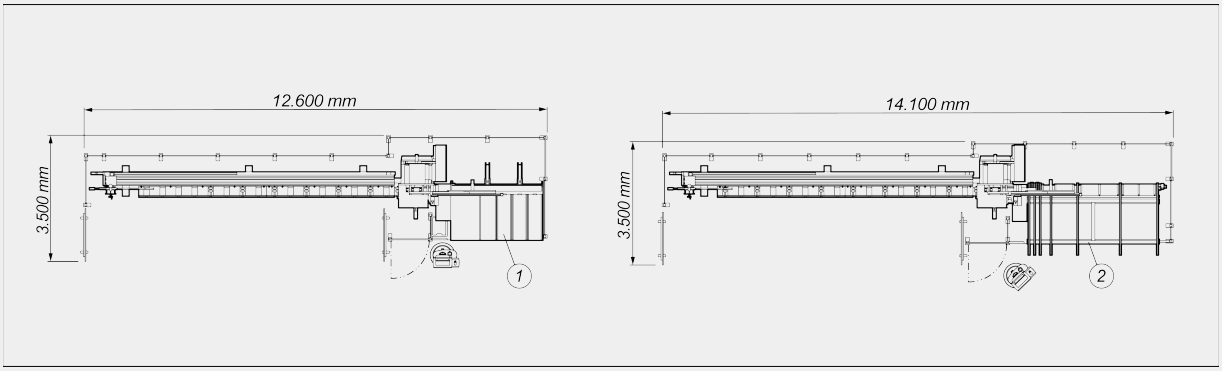

1. Unloading magazine with automatic extraction system (standard)
2. Belt unloading magazine with automatic extraction system (optional)

The overall dimensions may vary depending on the product configuration.

AXIS STROKES

LOADING UNIT: PROFILE POSITIONING

Max. loadable profile width (mm)	190
Infeed roller conveyor	●
Electronic axis gripper positioning (V and W axes)	○
Theoretical minimum cutting length (mm)	0
Minimum machinable profile section (mm)	30 x 30
Max. loadable profile length (mm)	6.850

CUTTING UNIT


Blade diameter at carbide-tipped (mm)	Ø = 550
Power rating (kW), “three-phase” blade drive motor	3
Minimal oil diffusion lubrication system	●
Pre-set for swarf exhauster	●
Hydro-pneumatic blade feed	●

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY


Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

CUTTING DIAGRAM

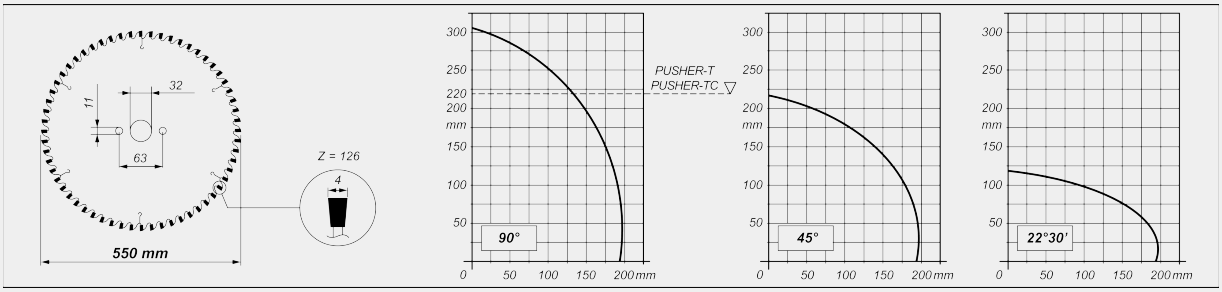

CUTTING UNIT TILTING

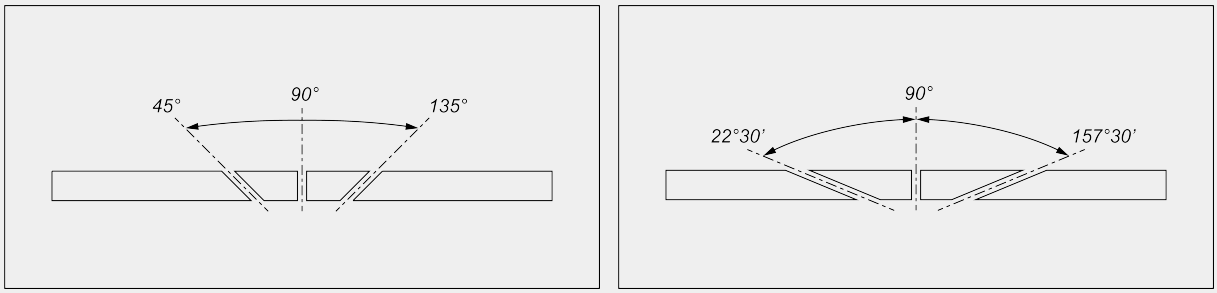

Electronic adjustment of intermediate angles

UNLOADING UNIT

Max. profile length that can be unloaded automatically on standard unloading bench (mm)	2.500
Unloading workbench with automatic ejector	●
Max. profile length that can be unloaded automatically with optional belt magazine (mm)	4.000
Optional belt magazine depth (mm)	2.000

SAFETY DEVICES AND PROTECTIONS

Cutting area pneumatically-controlled integral protection	●

WORKPIECE LOCKING

Vice pressure reduction with pressure gauge	●
Horizontal pneumatic vice	●
Vertical pneumatic vices	3

Included ● Available ○

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.