



## **M-S 300**

Single head cutting-off machines




Single-head, rising blade cutting-off machine designed for cuts at 90°, 45° left and right and intermediate angles.



### Cutting zone

The sturdy cast-iron horizontal support surface, with its vertical square rigidly coupled to it, forms the workpiece clamping area, which features a large bearing area for optimum clamping of workpieces.

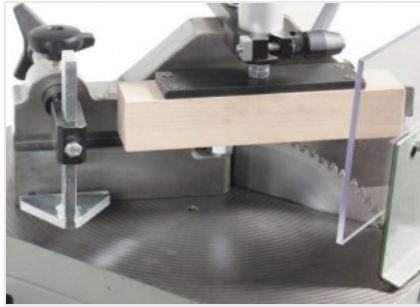

### Blade

The cutting-off machine is equipped with a 300-mm cemented carbide blade mounted on a manually actuated feed system.



### Vices

The machine is equipped with a horizontal and vertical vice assembly, which are pneumatically actuated in the S version, and manually actuated in the M version.





M-S 300 / SINGLE HEAD CUTTING-OFF MACHINES

BLADE


Made of Widia (mm)

Ø = 300

BLADE FEED

Manual

CUTTING DIAGRAM

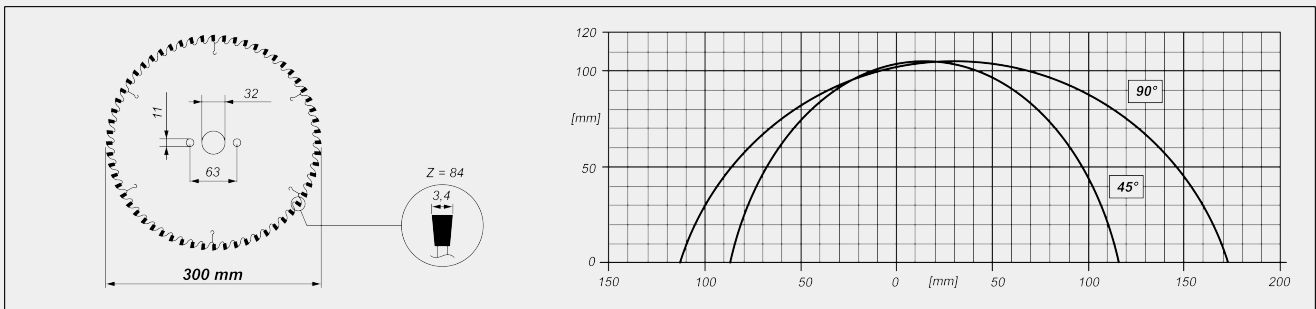

CUTTING UNIT TILTING



Mechanical adjustment of intermediate angles

CUTTING AREA PROTECTION

Local, manually controlled

LUBRICATION SYSTEM

Manual

Emmegi S.p.A.  
 Via Archimede, 10  
 41019 - Limidi di Soliera (MO)  
 ITALY

Tel +39 059 895411  
 Fax +39 059 566286  
 P.Iva/C.Fisc 01978870366  
 info@emmegi.com  
 www.emmegi.com

The right to make technical alterations is reserved.

**PROFILE POSITIONING**Manual workpiece reference stop **WORKPIECE LOCKING**Manual or pneumatic vertical vice (according to model) 

1

Horizontal manual vice 

1

**MOTOR**Three-phase brake motor Brake intervention time (s) 

10

Power (kW) 

1,5

Included  Available