

SCA Mini P 400

Single head cutting-off
machines

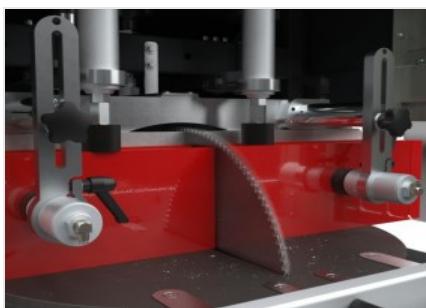


Single-head cutting-off machine with rising blade, with left loading side, able to perform cuts from 15° left to 15° right and intermediate angles.

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

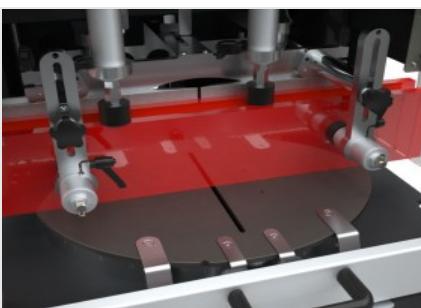
Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is
reserved.



Cutting zone

The rugged horizontal work bench associated with the vertical striker allows optimum positioning of the workpiece to be cut, thus ensuring considerable accuracy of the cut surface.



Vices

Thanks to the technical solutions adopted, the horizontal and vertical vices ensure the utmost rigidity in workpiece clamping as well as rapid repositioning of the vices. Such characteristic allows the use of this machine in window/door manufacture.



Control

The control console allows user-friendly and intuitive machine operation. The practical lever with scale serves for rapid angular positioning of the blade. Instead, a further adjusting system allows adjustment of the vice pressure and blade outfeed rate.



Swarf drawer

A practical swarf drawer allows efficient collection of the processing debris thus ensuring clean conditions of the machine and work area.



emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

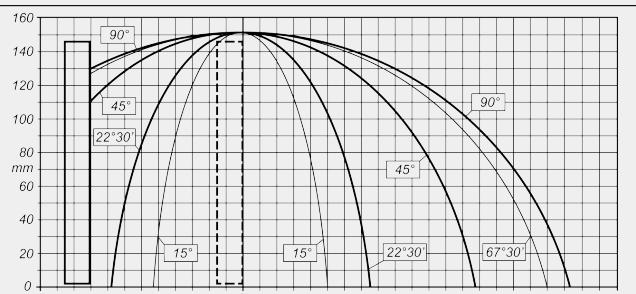
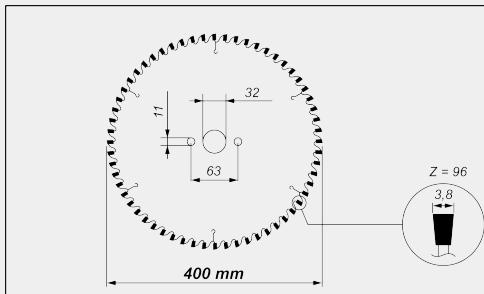
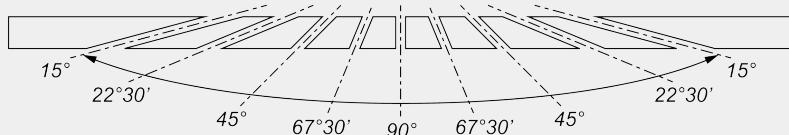
SCA MINI P 400 / SINGLE HEAD CUTTING-OFF MACHINES
BLADE

Made of Widia (mm)

$\varnothing = 400$

BLADE FEED

Pneumatic

CUTTING DIAGRAM

CUTTING UNIT TILTING


Mechanical adjustment of intermediate angles

CUTTING AREA PROTECTION

Full guard manually operated

LUBRICATION SYSTEM

Spray-mist lubrication with oil emulsion

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is reserved.

WORKPIECE LOCKING

Pair of pneumatic vertical vices

Optional additional horizontal vices

2

MOTOR

Three-phase (without brake)

Power (kW)

1,5

Motor speed (rpm)

2.800

Included ● Available ○

Emmegi S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel +39 059 895411
Fax +39 059 566286
P.Iva/C.Fisc 01978870366
info@emmegi.com
www.emmegi.com

The right to make technical alterations is
reserved.